


The Lockwood (CE) spec machine model LMP, is the new style tray sealing machine.

## NEW Lockwood tray sealing machine to Lockwood (CE) spec, model LMP

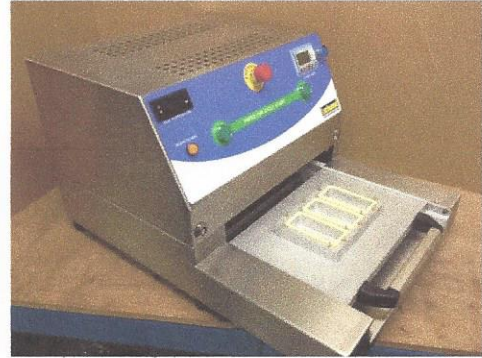

This new proven machine is fully CE certified.

**Machine Start Up:** On initial start-up the machine must warm up to reach the target temperature. There is a 'Ready' light to indicate when the machine initially reaches the target temperature and is ready to seal, the PLC will prevent the machine from being operated before the target temperature is reached.

### Operation Method:

1. The loaded product is placed into the lower seal drawer, the lidding sheet is placed on top within the guides on the tray and the two clamp bars hold the film down.
2. The drawer is pushed into the machine until it stops.
3. The two green start buttons on the front of the machine are pushed (two handed start for safety) and the head will automatically come down and seal the lid to the tray.  
If one finger is removed from a start button before the head has fully engaged the head will instantly raise preventing any possibility of injury. Once the head is fully engaged (after about 1.5 seconds) the operator can remove their fingers from the start buttons.
4. The head automatically retracts after the pre-programmed seal time has elapsed and the drawer is pulled out and the tray is removed.

### General Specification:

Electrical	240v AC single phase 50Hz 13 Amp max.
Pneumatic	0.005 cu metre/cycle, pressure 80psi, external supply required
Weight	60kg
Dimensions	800mm long x 580mm wide x 450mm high

### Options:

- 1) Silent Compressor with piping and regulator valve with a single phase 240v supply cable and plug – 1 compressor will run up to 3 machines.
- 2) Mobile Cabinet, all stainless steel, with front storage drawer and 2x fixed / 2x locking castor wheels. This cabinet is designed to house the above silent compressor.
- 3) Profiled heat seal head and ceramic Teflon coated.

### Medical options included:

Outlet for compressed air exhaust – 6mm push fit  
Exhaust air from solenoid also connected to outlet above  
Compressed air inlet regulator and filter – 6mm push fit

[Thermoforming Production](#)   [Contract Packing](#)   [Thermoforming Machines](#)   [Blister & Tray Packing Machines](#)

**Lockwood Packaging Ltd**

[www.lockwooduk.com](http://www.lockwooduk.com)

Unit 18 Lady Lane Industrial Estate  
Hadleigh  
Suffolk - IP7 6BQ. UK

Tel: +44 (0)1473 824222  
Fax: +44 (0)1473 829976